


COMPANY NAME: \_\_\_\_\_ P/N: \_\_\_\_\_

MACHINE DESCRIPTION, MAKE, MODEL: \_\_\_\_\_

HYDRAULIC CYLINDER APPLICATION: \_\_\_\_\_

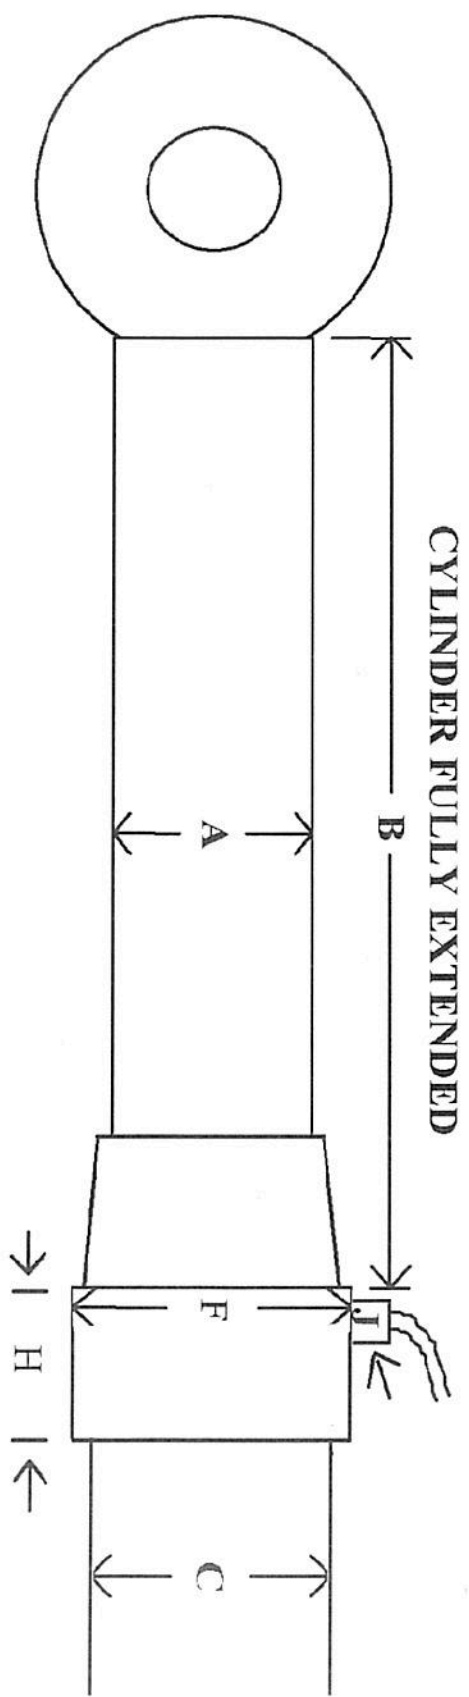

**GIVE DIMENSIONS FOR:**  
(SPECIFY DIAMETER OR CIRCUMFERENCE)

- A- \_\_\_\_\_
  - B- \_\_\_\_\_
  - C- \_\_\_\_\_
  - D- \_\_\_\_\_
  - E- \_\_\_\_\_
  - F- \_\_\_\_\_
  - G- \_\_\_\_\_
  - H- \_\_\_\_\_
  - I- \_\_\_\_\_
  - J- \_\_\_\_\_
- Fabric Requested - \_\_\_\_\_

If there is a grease zerk in the rod eye clevis, mark the location and how far from the end of the rod it is located. We will need to make allowances if strap is used to allow access to the zerk.

